


Display slides horizontally left and right, and rotates 360°

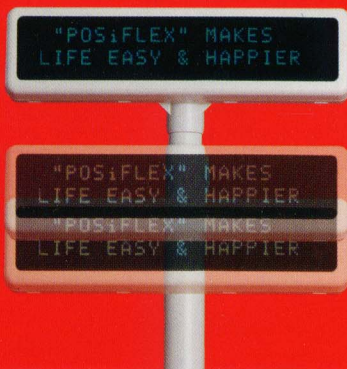

Adjustable pole height, two adjustable viewing angles and selectable brightness.

- Ergonomic design.
- Bright green fluorescent display.
- Two-line display with 20 large, alphanumeric characters per line (11.25mm x 7.2mm)
- Interfaces available to connect to computers:
 - PD-2100S: Standard serial interface.
 - PD-2100SP: Serial pass-through interface.
 - PD-2100PP: Parallel pass-through interface.
 - PD-2200: Serial pass-through interface.
- Four selectable command emulation modes supported. EPSON DM-202 Emulation is supported in all models except PD-2100PP.
- PD-2200: Wide base for stand-alone applications. (220mm x 110mm x 41mm)
- Compact base housing for PD-2100S/SP/PP. (80mm x 60mm x 51mm). Mounting plate provided to attach to counter or to the bottom of the cash drawer.
- Shock-absorbing base for PD-2100S/SP/PP.
- Two adjustable viewing angles and selectable brightness.
- Adjustable pole height.
- Display slides horizontally left and right, and rotates 360° .

SPECIFICATIONS	PD-2100S	PD-2100SP	PD-2100PP	PD-2200
Number of Characters Displayed	2 lines of 20 characters			
Character Format	5 x 7 dots			
Character Size	11.25mm (H) x 7.2mm (W) 0.44" x 0.28"			
Display Type	Green Vacuum Fluorescent Display (VFD), λ =505mm			
Mechanically Adjustable Items	Horizontal slide (~100mm), horizontal rotation (~360°), vertical height (135mm), view angle (14.5°, 30°)			
Display Head Size	260mm (W) x 70mm (H) x 60mm (D) 10.24" x 2.76" x 2.36"			
Overall Height	309 ~ 444mm (78.49" ~ 17.48")			291 ~ 426mm (11.46"x16.77")
Base Size	80mm (W) x 51mm (H) x 60mm (D) 3.15" x 2.00" x 2.36"			220mm(W) x 41mm(H) x 110mm (D) 8.66" x 1.61" x 4.33"
Application	Mounting plate to attach base to counter or to the bottom of cash drawer			Stand alone base
Weight	0.681 kg (1.5 lbs)			
Power Supply	Adapter included			Adapter optional
Interface	Standard serial	Serial pass through	Parallel pass through	Serial pass through
Command Sets	4 modes including EPSON command emulation			
Operating Temperature	-20 ~ + 50°C			
Storage Temperature	-40 ~ + 80°C			
Relative Humidity	90%, non-condensing			
Vibration	4G			
Shock	40G			

POSIFLEX Business Machines, Inc.

29460 Union City Blvd., Union City, CA 94587, U.S.A.

Tel.: +1-510-429-7097

Fax.: +1-510-475-0982

E-mail : Sales@posiflexusa.com

http://www.posiflexusa.com

