

Programmable POS Keyboard PKB-044/078 Series



TYSSO®

Insist on the Best



PKB-044



PKB-078


FEATURES

- Membrane key switches with tactile feeling
- 10 million strokes operating life cycles
- True keyboard wedge function: Key Code or ASCII Code
- Windows software programming without TSR program
- Magnetic stripe card reader available with various track combinations
- 6 positions key lock function
- Each key can be programmed up to 200 codes
- Up to 16 layers programming capability
- Non-volatile memory 10KB

SPECIFICATIONS

Models	PKB-044	PKB-078
	<i>Physical</i>	
Material	ABS	
Interface	PS/2	
Key Switch	Membrane	Membrane or Mechanical (Option)
Dimension	234L x 144W x 45H mm	290L x 175W x 45H mm
Cable Length	2800mm	
Weight	0.68Kg	1.12Kg
Color	Black or white (Option)	
Travel Distance	4±0.5mm	
Operating Life Cycles	10 million strokes	
	<i>Electrical</i>	
Power Supply	+5VDC±10%	
Interface	PS/2	
Current Input	≤ 100mA	
	<i>Magstripe Card Reader (Option)</i>	
Card Density	Track 1: 210BPI with max. 76 characters Track 2: 75BPI with max. 37 characters Track 3: 210BPI with max. 107 characters	
Magnetic Tracks	Track 1 or Track 2 or Track 3 or Dual Track (Track 1&2 or Track 2&3) or Three Track (Track 1&2&3)	
Card Swipe Speed	10 to 100 cm/sec.	
Swipe Cycles	300,000 or 1,000,000 (Option)	
	<i>Others</i>	
OS	Windows 98, ME, 2000, XP, Vista 32	
6 Position Key Lock & Keys	Option	Standard
Operating Temperature	0°C ~ +40°C	
Storage Temperature	-20°C ~ +55°C	
Operating Humidity	40% ~ 90%	

DIMENSIONS

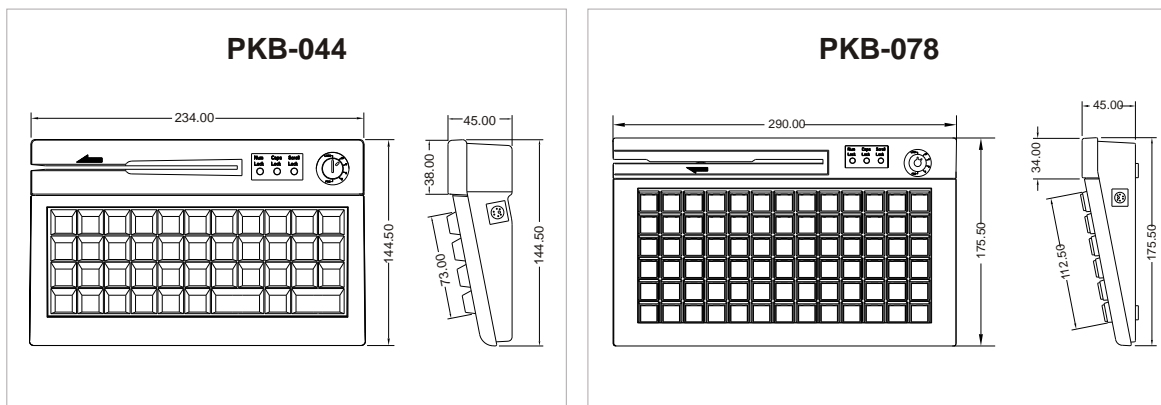

Manufacturer

FAMETECH INC.2F, No. 165, Sec. 2, Ta-Tung Rd.,
Hsi-Chih 221, Taipei Hsien, Taiwan

Tel : 886-2-8692-6300

Fax: 886-2-8692-6301

E-Mail: tyssso@ms6.hinet.net

URL: <http://www.famotech.com.tw>

Distributor