


## 2-inch Pinhole printer

# NP-266

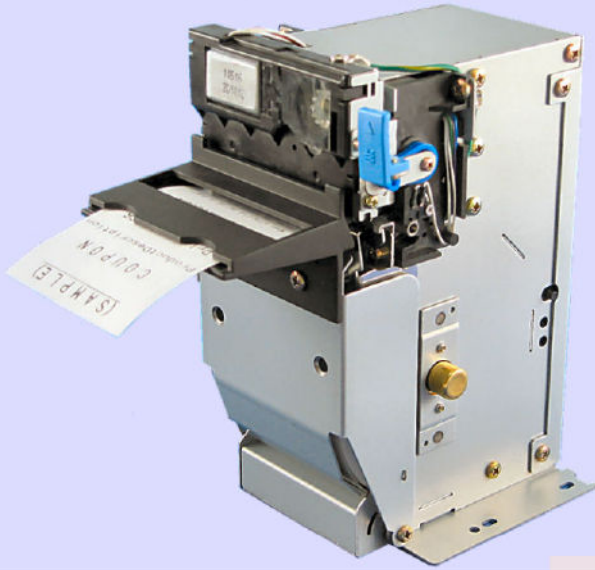

### Features

- High Speed 220 mm/sec print
- Drop-in type, easy paper loading.
- Presenter NPT-305 is available.

### Application

- Queuing management
- Fuel Pump
- Electronic prepaid card
- Parking lot system

### Dimensional drawing

### Specifications

Model	NP-266
Print method	Line thermal dot
Paper width / Print width	58mm / 54mm
Print speed	Max.220mm/sec.
Resolution	8dots/mm
Character size (dot x dot)	FontA(12x24):1.50x3.00mm,FontB(9x17):1.13x2.13mm
Character types	ANK, Japanese, Extend graphic character set, International, Polish, Russian, Scandinavian, Turkish
Barcode	UPC-A, UPC-E, JAN13(EAN), JAN8(EAN), CODE39, ITF, CODA BAR, CODE128, QRcode
Line feed pitch	0.125mm
Interface	Serial(RS-232C) / USB(V2.0 Full speed) *Factory setting
Input buffer	Approx.10kb
Operating voltage	Type I: DC5V±5%, DC24V±5%, Type II: DC24V±5%
External Dimensions	103.5(W) x 106.7(D) x 161.3(H) mm
Weight	Approx. 1050g
Paper type	Thermal paper (80mm in diameter)
Operating temperature	5 ~ 45°C
Storage temperature	-10 ~ 50°C
Reliability (head)	More than 100 million pulses , More than 100Km wear distance
Auto cutter	500,000cuts, Full cut or Partial cut *Factory setting
Safety regulation	CE, UL 60950

2-inch

Pinhole

Auto Cutter

**DED**  
LIMITED

Mill Road, Lydd, Kent. TN29 9EJ

Tel: 01797 320636


Fax: 01797 320273

Email: sales@ded.co.uk

Web: www.ded.co.uk

## 2-inch Pinhole printer

## NP-266Slim

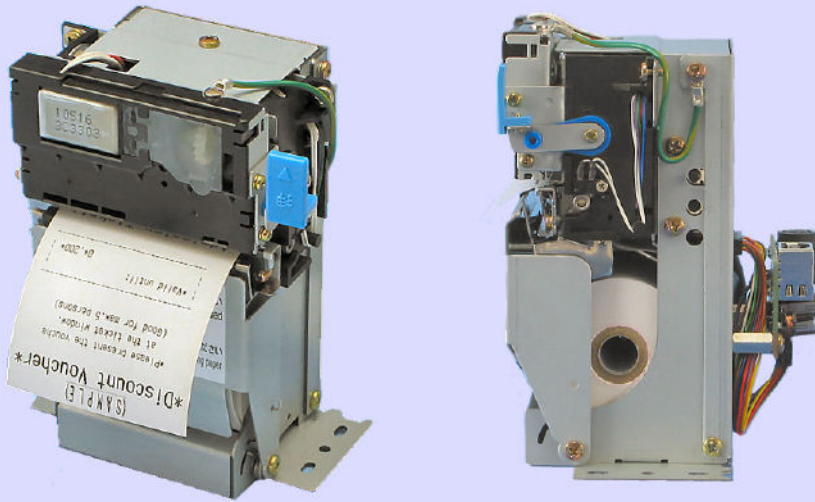

### Features

Suitable for Parking ticket issue.  
High Speed 220 mm/sec print

### Application

Information KIOSK  
Fuel Pump  
ATM / CD  
Parking lot system

### Dimensional drawing

**2-inch**

**Pinhole**

**Auto Cutter**

### Specifications

Model	NP-266Slim
Print method	Line thermal dot
Paper width / Print width	58mm / 54mm
Print speed	Max. 220mm/sec.
Resolution	8dots/mm
Character size (dot x dot)	FontA(12x24):1.50x3.00mm, FontB(9x17):1.13x2.13mm, Kanji(24 x 24):3.00 x 3.00mm
Character types	ANK, Japanese, Extend graphic character set, International, Korean, Chinese (GB18030-2000), Greek, Polish, Russian, Scandinavian, Turkish
Barcode	UPC-A, UPC-E, JAN13(EAN), JAN8(EAN), CODE39, ITF, CODA BAR, CODE128, QRcode
Line feed pitch	0.125mm
Interface	Serial(RS-232C) / USB(V2.0 Full speed) *Factory setting
Input buffer	Approx. 10kb
Operating voltage	Type I: DC5V±5%, DC24V±5%, Type II: DC24V±5%
External Dimensions	103.5(W) x 97.8(D) x 131.3(H) mm
Weight	Approx. 850g
Paper type	Thermal paper (50mm in diameter)
Operating temperature	5 ~ 45°C
Storage temperature	-10 ~ 60°C
Reliability (head)	More than 100 million pulses , More than 100Km wear distance
Auto cutter	500,000cuts, Full cut or Partial cut *Factory setting
Safety regulation	-

**DED**  
LIMITED

Mill Road, Lydd, Kent. TN29 9EJ

Tel: 01797 320636

Fax: 01797 320273

Email: sales@ded.co.uk

Web: www.ded.co.uk