



TCM300/400 Visual Card Kiosk Printer

Features

- **Re-writeable card kiosk printer**
- **4-6 second erase & print cycle**
- **500 rewrites per card at 203dpi**
- **200 card capacity input feeder**
- **230VAC mains PSU**
- **Interface: Serial RS232C or USB**
- **Windows 2000/XP Drivers**

The TCM300/400 are "thermochromic" visual card printers designed for applications where it is necessary to erase and reprint data on a plastic card.


The front surface of the card can be erased and reprinted upto 500 times at 203dpi with text, graphics and barcodes.

Card thickness is 0.20mm for the TCM300 and 0.76mm for the TCM400. The rewritable coating can be supplied to print in blue or black and the cards themselves can be preprinted in upto 4 colours front and reverse.

The TCM300 is supplied as standard with an integrated 3 track magnetic stripe encoder whereas the TCM400 is available with a magnetic stripe and/or proximity card encoder (Mifare or HID).

The input feeder capacity is 200 cards (0.76mm) and the printers are available with either an RS232C Serial or Centronics Parallel interface.

Windows drivers for 2000 & Xp are available.

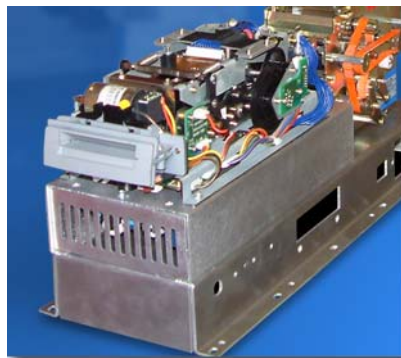

Tel: 01797 320636 Fax: 01797 320273

Specification

TCP300 Reader / Writer

Card Feed Speed	up to 400mm / second
Interface	RS-232C, D-sub 9-Pin or USB (Ethernet Option)
Magnetic Stripe Read/Write	1 Track or 3 Tracks; JIS2 / ISO
System Reliability	500,000 Card Pass under normal conditions
Operating Conditions	5 to 35°C, 20 - 80% RH (w/o condensation)
Storage Conditions	-30 to 35°C, 20 - 90% RH (w/o condensation)
Dimensions / Weight	119 (w) x 270 (d) x 132.5 (h) mm / 2.5Kg

TCP300 Reader / Writer

Card Feed Speed	up to 300mm / second with two quality modes
Interface	USB with LAN / Ethernet and RS232C options
Magnetic Stripe Read/Write	1 Track or 3 Tracks; JIS2 / ISO
System Reliability	300,000 Card Pass under normal conditions
Operating Conditions	5°C to 35°C, 20 to 80% RH (without condensation)
Storage Conditions	-30°C to 35°C, 20 to 90% RH (without condensation)
Dimensions / Weight	119 (w) x 270 (d) x 132.5 (h) mm / 2.5Kg

