


2-inch ■ Kiosk printer

NP-2511

NEW

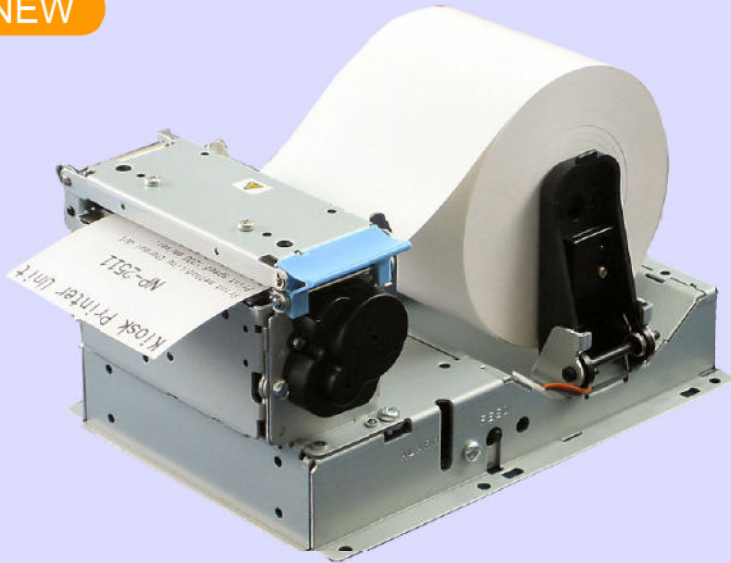

Features

- Lock free cutter
- Max. 200mm/sec. High Speed printing.
- Paper thickness up to 150 micrometer
- Capable of using presenters



Application

- Queue Management System
- Information KIOSK
- Coin-locker system

Dimensional drawing

Specifications

Model	NP-2511
Print method	Line thermal dot
Paper width / Print width	58, 60mm / 54, 56mm
Print speed	Max. 200mm/sec
Resolution	8dots/mm
Character size (dot x dot)	FontA(12x24):1.50x3.00mm, FontB(9x17):1.13x2.13mm, Kanji(24x24)
Character type	ANK, Japanese, Extend graphic character set, International, Korean, Chinese (GB18030-2000), Greek, Polish, Russian, Scandinavian, Turkish
Barcode	UPC-A,UPC-E, JAN13(EAN), JAN8(EAN), CODE39, ITF, CODA BAR, CODE128
Line feed pitch	0.125mm
Interface	Serial(RS-232C) & USB(V2.0 Full speed)
Input buffer	Approx. 10K bytes
Operating voltage	DC24V±5%
External dimensions	106(W) x 150.4(D) x 75.2(H)mm
Weight	Approx. 640g
Paper type	Thermal paper (83mm in diameter)
Operating temperature	-20 ~ 60°C
Storage temperature	-30 ~ 70°C
Reliability (head)	100km
Auto cutter	1 million cuts, Full & Partial cut *Command selectable
Safety regulation	CE, VCCI: ClassA, FCC: ClassA

2-inch

Auto loading

Openable head

Auto cutter

DED
LIMITED

Mill Road, Lydd, Kent. TN29 9EJ

Tel: 01797 320636

Fax: 01797 320273

Email: sales@ded.co.uk

Web: www.ded.co.uk


Options

NP-2511

NEW

New Bezel
BEZ-220

NP-2511+Bezel

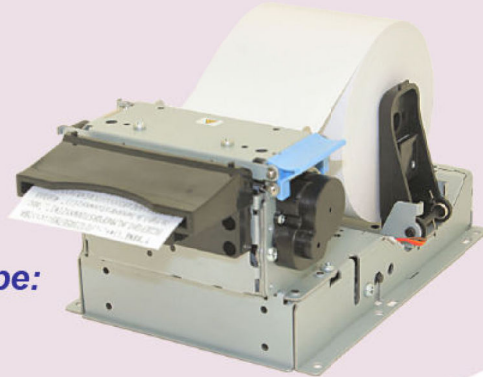

Sensor attached type:
BEZ-221

NEW

NP-2511V

Vertical mount type



NEW


Retraction presenter
NPT-306



NEW

NP-2511JP

NP-2511
+
UPH-2511
+
NPT-306

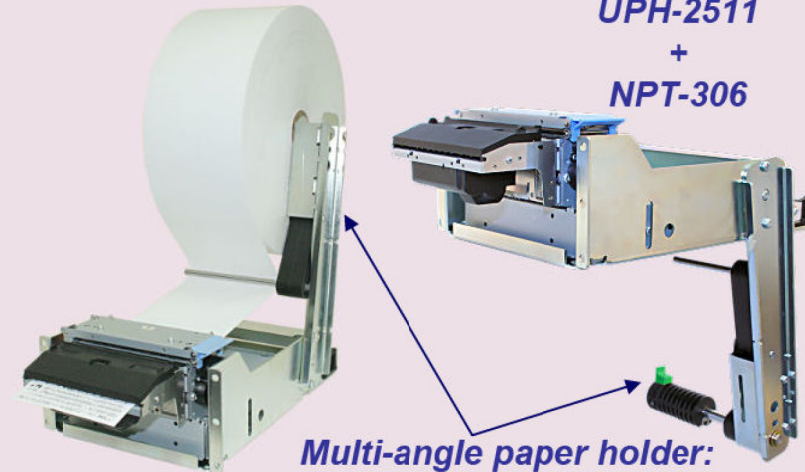

Multi-angle paper holder:
UPH-2511