




SP298 Series

Fast, Reliable, Cost Effective Matrix Impact Slip Printers

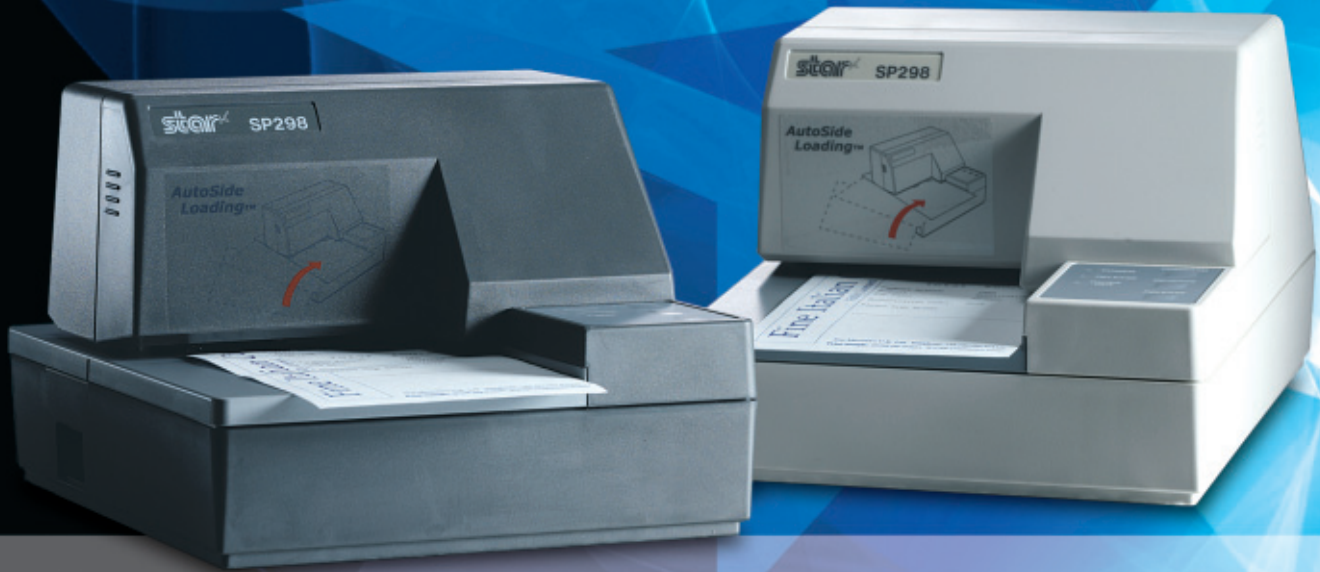

- Rugged bi-directional printer capable of graphics using a highly reliable 9-pin print head
- Up to 3.1 lines per second with bi-directional cheque mode
- High reliability with helix head drive 9 million lines Calculated Real Time MCBF / 2.5 million lines Traditional
- Epson TM-U295 compatible with same size footprint and interchangeable power supply

Typical Applications

Ideal for printing 'company branded' pre-printed multi-part slips / forms



- Hotels
- Restaurants
- POS
- Pharmacy Printer

SP298 MD Serial Version

SP298 MC Parallel Version

Unique AutoSide Loading™

The printer features unique paper AutoSide Loading making document loading quick, easy and reliable. The user can simply introduce a form into the side of the station and the printer performs automatic document clamping, instant top of form alignment, fast printing and selectable forward or reverse document eject.



SP298 Printer Specifications

Printer Method	9-pin serial impact dot matrix with true descenders
Print Speed	up to 3.1 lines per second with bi-directional cheque mode
Emulation	Star Mode & ESC/POS™ (Epson TM-U295)
Interface	Serial or Parallel
Paper:	
Copy Capability	Original + two copies
Paper Width / Length	69 / 80mm (minimum)
Margin Top / Bottom	5 / 14mm
Paper Feed Speed:	
Forward / Reverse	3.5 / 4.5 inches per second or 21 / 27 lines per second
Number of Columns	42 (7 x 9 font)
Print Width	63mm
Peripheral Driver	Two drivers with compulsion switch input

Buffer:	
Star Mode	2048 Byte
ESC/POS™ Mode	512 Byte or 35 Byte
Reliability	MCBF 9 million lines Calculated Real Time MCBF / 2.5 million lines (Traditional)
Head Life	70 million characters
Power Supply	PS60 option 24V with Hosiden connector
Dimensions	180 (W) x 190 (D) x 138.5 (H) mm
Weight	2.1Kg (approx.)
Agency Approvals	UL, C-UL, FCC, TÜV, CE, CB
Ribbons	Black RC200B, 1.2 million characters RC2000D Laundry Ribbon
Drivers Available	OPOS™, Windows™ line mode with control font support, JavaPOS™

UK8.08



DED Limited
Mill Road, Lydd, Kent
TN29 9EJ, England

Tel: +44 (0)1797 320636
Email: sales@ded.co.uk
www.ded.co.uk

www.Star-EMEA.com