


2-inch Kiosk printer

NP-2261

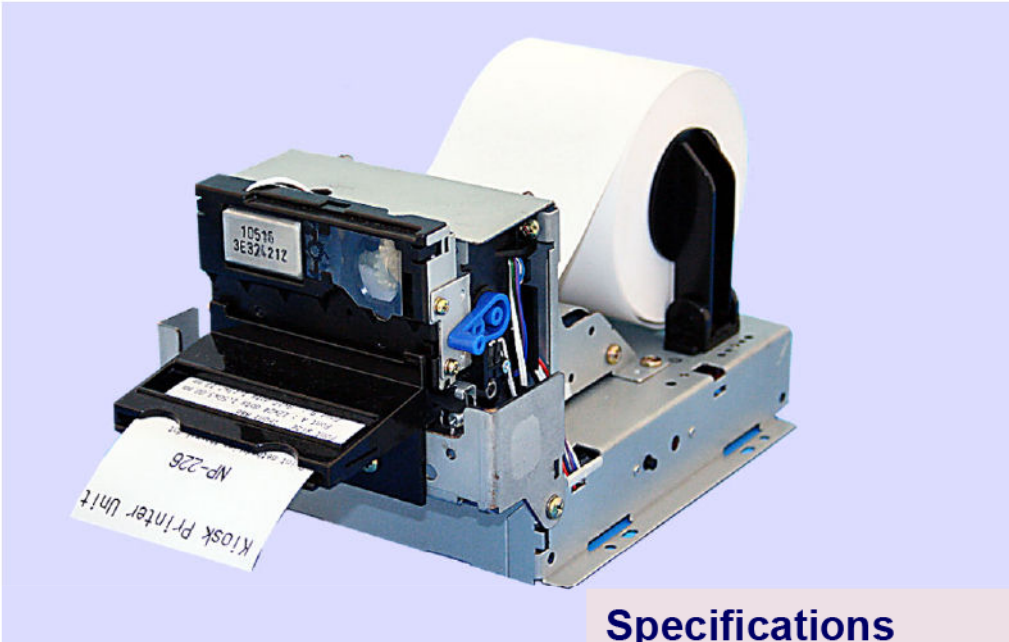

Features

- High speed print, 220mm/sec.
- Multi language
- Jam-free bezel as a standard equipment
- Retraction paper presenter NPT-305 available

Application

- High way ticket
- Information KIOSK

Dimensional drawing

Specifications

Model	NP-2261
Print method	Line thermal dot
Paper width / Print width	58mm / 54mm
Print speed	Max. 220mm/sec.
Resolution	8dots/mm
Character size (dot x dot)	FontA(12x24):1.50x3.00mm, FontB(9x17):1.13x2.13mm
Character types	ANK, Japanese, Extend graphic character set, International, Korean, Chinese (GB18030-2000), Greek, Polish, Russian, Scandinavian, Turkish
Barcode	UPC-A, UPC-E, JAN13(EAN), JAN8(EAN), CODE39, ITF, CODA BAR, CODE128, QRcode
Line feed pitch	0.125mm
Interface	Parallel Centronics / Serial(RS-232C) / USB(V2.0 Full Speed) *Factory setting
Input buffer	Approx. 10kb
Operating voltage	DC24V±5%,
External Dimensions	125(W) x 203.4(D) x 103(H) mm
Weight	Approx. 850g
Paper type	Thermal paper (83mm in diameter)
Operating temperature	5 ~ 45°C
Storage temperature	-10 ~ 60°C
Reliability (head)	More than 100 million pulses, More than 100Km wear distance
Auto cutter	500,000 cuts, Full cut / Partial cut *Factory setting
Safety regulation	CE, VCCI: Class A, FCC: Class A

2-inch

Auto loading

Auto cutter

DED
LIMITED

Mill Road, Lydd, Kent. TN29 9EJ

Tel: 01797 320636


Fax: 01797 320273

Email: sales@ded.co.uk

Web: www.ded.co.uk

2-inch Kiosk printer

NP-2261Large

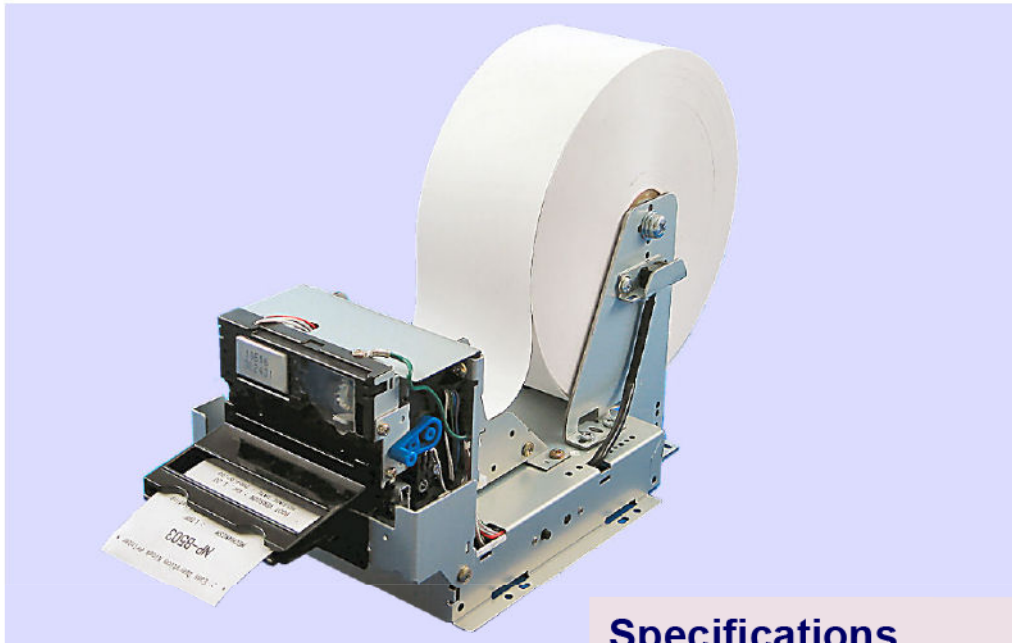

Features

- 150mm diameter roll holder.
- High speed print at 220mm/sec.
- Jam-free bezel as a standard equipment
- Retraction paper presenter NPT-305 available

Application

- Information KIOSK
- Ticket issue

Dimensional drawing

Specifications

Model	NP-2261Large
Print method	Line thermal dot
Paper width / Print width	58mm / 54mm
Print speed	Max. 220mm/sec.
Resolution	8dots/mm
Character size (dot x dot)	FontA(12x24):1.50x3.00mm, FontB(9x17):1.13x2.13mm
Character types	ANK, Japanese, Extend graphic character set, International, Korean, Chinese (GB18030-2000), Greek, Polish, Russian, Scandinavian, Turkish
Barcode	UPC-A, UPC-E, JAN13(EAN), JAN8(EAN), CODE39, ITF, CODA BAR, CODE128, QRcode
Line feed pitch	0.125mm
Interface	Serial(RS-232C) / USB(V2.0 Full Speed) *Factory setting
Input buffer	Approx. 10kb
Operating voltage	DC24V±5%,
External Dimensions	125(W) x 237(D) x 118(H) mm
Weight	Approx. 1050g
Paper type	Thermal paper (150mm in diameter)
Operating temperature	5 ~ 45°C
Storage temperature	-10 ~ 60°C
Reliability (head)	More than 100 million pulses , More than 100Km wear distance
Auto cutter	500,000 cuts, Full cut or Partial cut *Factory setting
Safety regulation	CE, VCCI: Class A, FCC: Class A

2-inch

Auto loading

Auto cutter

DED
LIMITED

Mill Road, Lydd, Kent. TN29 9EJ

Tel: 01797 320636

Fax: 01797 320273

Email: sales@ded.co.uk

Web: www.ded.co.uk